



ULTRA-THIN VGA CABLES

- Pencil Thin with 3 Micro Coax Elements.
- Gold Plated Contact.
- Low Profile Slotted Metal Thumbscrew.
- Light Weight/High Performance.
- Thumbscrews with Longer Thread Available.



Male to Male

S-H15MM(LL)'UT

LL= Length(ft): 3, 6, 10, 15.

Male to Female

S-H15MF06'UT

S-H15MF10'UT



MONITOR + AUDIO CABLES

- High Density 15 Pin Connectors Male to Male.
- Fully Loaded.
- VGA (Coax Style) Cable with Stereo. 3.5 Plug to Plug.
- One End with Ferrite for length up to 15 ft, Both Ends with Ferrite for length 25 ft and Above.
- Great for Monitor with Speaker(s) or Projector with Audio Output.



S-H15MM3.5-(LL)'XL

LL= Length(ft): 3, 6, 10, 12, 15, 25, 35, 50, 75, 100.



VGA MONITOR CABLES

- VGA Monitor Extension and Adaptor Cable.
- High Density 15 Pin Connectors.
- Full 15 Conductors; Wired Straight Through.
- 26 AWG Stranded Conductors (Unless Noted Otherwise); Mylar Foil Shielded Cable.
- Molded w/ Thumb Screws.



Male to Male

S-H15MM06'

S-H15MM10'

S-H15MM25'

Female to Female

S-H15FF-6'

S-H15FF-10'



S-H15MF

Male to Female (Extension)

S-H15MF01'(28AWG)

S-H15MF06'

S-H15MF10'

S-H15MF25'

DB9 to High Density 15 Pin Adaptor Cable

S-9M15HF-6'

S-9M15HM-6'

S-9F15HF-6'

S-9F15HM-6'



See Pg 92 for Adaptors.

Super VGA (Coax Style) Cable

- 4.5 Twisted Pair + 3 Coax Elements.
- Braided and Foil.
- Black, Ridged Cable Jacket.
- All 15 pins, Fully Loaded Connection.
- Gold Plated Contacts.
- 4-40 Threaded Thumbscrew Ends.
- One End with Ferrite for Length up to 15 ft, Both Ends with Ferrite for Length 25 ft and Above.



Male to Male

S-H15MM(LL)'XL

Male to Female (Extension)

S-H15MF(LL)'XL

LL= Length(ft): 3, 6, 10, 15, 25, 35, 50, 75, 100.

Non-Ferrite

S-H15MM10'XLNF

S-H15MM15'XLNF



CL2 Rated

- Beige, Ridged Cable Jacket.


S-H15MM(LL)'XL2



LL= Length(ft): 25, 35, 50, 75, 100.

Cable Style: UL1354 3 elements of 28 AWG Video Coaxial Cables, 7 elements of 24 AWG Control Wires
Shielding, O.D= 9.3±0.5mm
Jacket Color Black

MCC-7+3C-1354

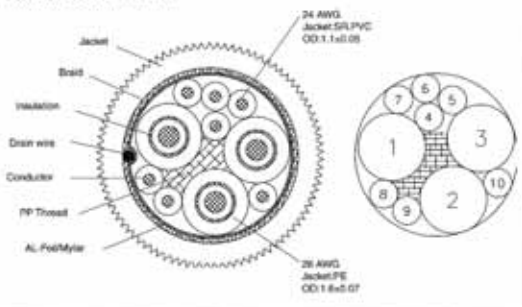

BULK CABLES

MCC-4.5P3C-2919L2 UL CL2 Style 2919, 4.5 Pair + 3 Coax, for VGA, 500ft.

MCC-5C-20276-328 UL Style 20276, 5 Mini-59 Coax, 328ft(100m).

MCC-5P3C-2919-600 UL Style 2919, 600ft. Roll

MCC-7+3C-1354 UL Style 1354, 500ft. Roll -See Above for Details

MCC-VKMZ-250 VKM ZIP Cable, 250ft.



See Previous Page for More Type of Bulk Cables