



AUDIO / VIDEO ACCESSORIES

IEEE-1394 CABLES

- 24 AWG Power Pair; 28 AWG Signal Pairs
- Foil and Braid Outer Shield
- Foil and Braid Signal Shield
- Twisted Pair Construction
- Gold Plated Contacts

FireWire!!!

Extension for 6 Pin Type

S-IEEE-1394X-6606

6 Pin M/F 6ft. Cable

S-IEEE-1394X-6615

6 Pin M/F 15ft. Cable

S-IEEE-1394-44-(LL)

S-IEEE-1394-64-(LL)

S-IEEE-1394-66-(LL)

S-IEEE-1394-94-(LL)

S-IEEE-1394-96-(LL)

S-IEEE-1394-99-(LL)

LL= Length(ft): 3, 6, 10, 15.



See Page 98 for Bracket Info



6 Pin Type (Signal+ Power)


4 Pin Type (Signal Only)

EZ CABLES

S-EZ-1394-44

S-EZ-1394-64

S-EZ-1394-66

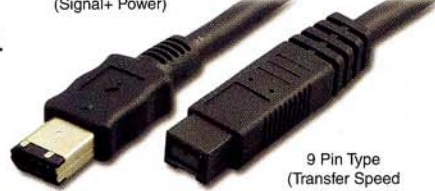

9 Pin Type (Transfer Speed Up to 800Mbps)



I3E-1394-6R-PCB 6 Pin Right Angle PCB Socket



BLUETOOTH

- Adds bluetooth capability to PC and laptop via USB connection.
- Connect to network and other bluetooth devices wirelessly.
- Bluetooth class 1 operation range of 10 meters.
- 2.4 Ghz unlicensed ISM frequency band.
- 1MB maximum data rate.
- -89dBm @ 0.1% BER Sensitivity.
- Built-in Antenna.
- LED status indicator.

Bluetooth USB Dongle

- Bluetooth V1.2 compliant
- USB V1.2 compliant



ADL-USB-BLT12



Bluetooth USB Adaptor

- Bluetooth V2.0 compliant
- USB UHCI/OHCI V1.1 compliant



ADL-USB-BLT20

SVHS CONNECTORS

- SVHS Plug (M) Solder Type Assembly
- Teflon (High Temp) Insulation

MD-SVHS-J65 I.D.=6.5mm.

MD-SVHS-P65 I.D.=6.5mm.



Complete Connector Kit

Connector Tip

- Replacement Back Hood with Various Inside Diameters

RBC-A175 Metal Back Hood I.D.= 7.5mm.

RBC-A180 Metal Back Hood I.D.= 8.0mm.

- Style A1, Pearl White.

RBC-A165PW ID= 6.5mm


RBC-A175PW ID= 7.5mm

RBC-A180PW ID= 8.0mm



DC ASSEMBLY TYPE POWER CONNECTOR

- All Types with Screw on Strain Relief (Except Right Angle Plugs).
- 9.5mm Barrel Length, Unless Otherwise Noted.
- Solder Terminal, Insulation Clamp Strain Relief.

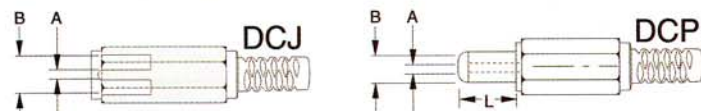

DC Jack

DCJ-5521A A=2.1, B=5.5 mm

DCJ-5525A A=2.5, B=5.5 mm



DC Plug

DCP-2307A A=0.7, B=2.3 mm

DCP-3010A A=1.0, B=3.0 mm

DCP-3513A A=1.3, B=3.5 mm

DCP-4017A A=1.7, B=4.0 mm

DCP-5521A A=2.1, B=5.5 mm

DCP-5525A A=2.5, B=5.5 mm



DC Adaptor

DCA-52125J A=2.1, B=5.5 mm Plug to A=2.5, B=5.5 mm Jack

DCA-52521J A=2.5, B=5.5 mm Plug to A=2.1, B=5.5 mm Jack

DC Plug Right Angle, Long Barrel

DCP-5521AR-L A=2.1, B=5.5 mm, L=14mm

DCP-5525AR-L A=2.5, B=5.5 mm, L=14mm

DC Plug Long Barrel

DCP-5020A-L A=2.0, B=5.0 mm, L=14mm

DCP-5521A-L A=2.1, B=5.5 mm, L=14mm

DCP-5525A-L A=2.5, B=5.5 mm, L=14mm

DC Plug Right Angle

DCP-5521AR A=2.1, B=5.5 mm

DCP-5525AR A=2.5, B=5.5 mm

