

PARALLEL PRINTER CABLES

- RS232 25 Pin Male to Centronic 36 Pin Male
- Molded w/ Thumb Screw
- Full Length Mylar Foil Shield
- 25 Wires; 26 AWG Stranded Conductors, an absolute must for bidirectional parallel port
- Ground Indented D-SUB Connectors



RS232 Male to Centronic Male

S-36M25M-(LL)'



LL= Length(ft): 2, 6, 10, 15, 25, 50, 100.

R = Right Angle (Exit Right)

S-36M25M-(LL)'R



L = Left Angle (Exit Left)

S-36M25M-(LL)'L



LL= Length(ft): 6, 10, 15.

CENTRONIC CABLES (Parallel)

- Centronic 36 Pin Connectors
- Full 36 Conductors; Wired Straight Through
- 26 AWG Stranded Conductors
- Molded, Mylar Foil Shielded Cable



Male to Female

S-36MF-18"

S-36MF-6"


S-36MF-10"

Male to Male

S-36MM-6"

S-36MM-10"

S-36MM-12"

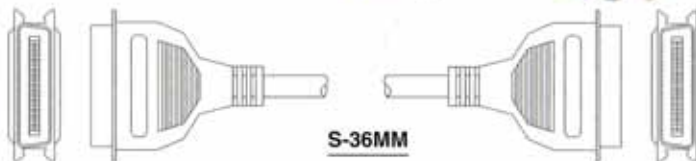

RS232 25 PIN CABLES (Serial)

- RS232 Dual 25 Pin
- Molded w/ Thumb Screw
- Full Length Mylar Foil Shield
- Fully Wired Straight Thru, 26 AWG Stranded Conductors
- For PC Serial Port and/or RS232 Type Applications
- Ground Indented D-Sub Plugs



25 Pin Male to Female

S-25MF-(LL)'



25 Pin Male to Male

S-25MM-(LL)'

LL= Length(ft): 2, 3, 6, 10, 15, 25, 50, 100.

25 Pin Female to Female

S-25FF-(LL)'

LL= Length(ft): 2, 6, 10, 25, 50, 100.



RS232 9 PIN CABLES (Serial)

- RS232 Dual 9 Pin
- Molded w/ Thumb Screw
- Full Length Mylar Foil Shield
- Fully Wired Straight Thru, 26 AWG Stranded Conductors
- For PC Serial Port and/or RS232 Type Applications
- Ground Indented D-Sub plugs



9 Pin Male to Female

S-9MF-75"

S-9MF-(LL)'

LL= Length(ft): 3, 6, 10, 15, 25, 50, 75.

9 Pin Male to Male

S-9MM-(LL)'

LL= Length(ft): 3, 6, 10, 15, 25, 50, 100.

9 Pin Female to Female


S-9FF-(LL)'

LL= Length(ft): 3, 6, 10, 15, 25, 50.



AT SERIAL ADAPTOR CABLES

- RS232 25Pin to 9 Pin
- Adapts Serial Port to RS232 Devices, i.e Modems, Printers
- Molded w/ Thumb Screws
- 9 Wires; 26 AWG Stranded Conductors
- Full Length Mylar Foil Shielded

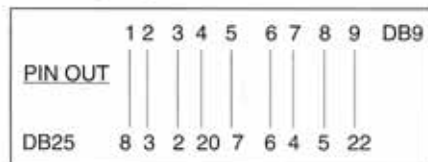

25 Pin Male to 9 Female

S-25M9F-(LL)'

LL= Length(ft): 1, 3, 6, 10, 15, 25.

25 Pin Male to 9 Male

S-25M9M-(LL)'


LL= Length(ft): 3, 6, 10, 15, 25.

25 Pin Female to 9 Female

S-25F9F-(LL)'

LL= Length(ft): 3, 6, 10.

S-25M9F

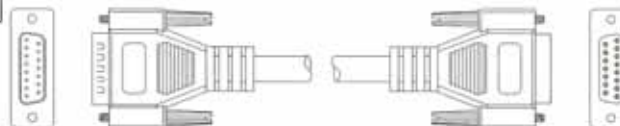

NULL MODEM CABLES & KITS


- 26 AWG Stranded Conductors
- Full Length Mylar Foil Shield
- D-Sub Plugs w/Grounding Indents
- Molded w/Thumb Screws (Null Modem Cable ONLY)
- Pin Out Diagram




S-25NM2-(xx)'

DB25 TO DB9 NM CABLE

DB25	DB9
2	2
3	3
4	8
5	7
7	5
8	4
20	1, 6



S-25NM2 Wiring




S-25NM3 Wiring

S-25M9F-NM-6'	DB25M to DB9F Null Modem Cable
S-25M9F-NM-10'	DB25M to DB9F Null Modem Cable
S-25NM2-10'	DB25 Standard Null Modem Cable, Male to Female
S-25NM2A-10'	DB25 Null Modem F/F 10ft Cable
S-25NM3-6'	Full Handshake
S-9NM-6'*	DB9 Null Modem Cable, Male to Female
S-9NM-10'*	DB9 Null Modem Cable, Male to Female
S-9NM2A-6'*	DB9 Null Modem F/F Cable
S-9NM2A-10'*	DB9 Null Modem F/F Cable
S-9NM2A-10'-BG	DB9 Null Modem F/F Cable, Beige Color
S-9NM2A-25'	DB9 Null Modem F/F Cable
S-MF10C-10'***	Pin Terminated, 10ft, 10 conductor Cable M/F
S-MM10C-10'***	Pin Terminated, 10ft, 10 conductor Cable M/M

* Pin Out See AD-D9NM Pg 100.

** Hood & Thumb Screw Included.

Be sure to order the proper Crimp Housing.

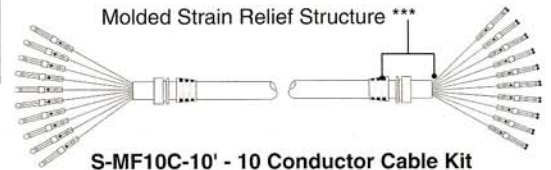

S-MF10C-10' - 10 Conductor Cable Kit

*** To Work in Conjunction with Snap on Hood

CISCO ROUTER CABLES

- Serial cables connecting the network system to the serial devices of the network. Used in the Cisco 7000 family, Cisco 4000 Series, Cisco 3600 Series, Cisco 2500 Series, Cisco 1600 Series, Cisco access Servers, and Access Pro PC cards.

CISCO Part #	PAN PACIFIC Part #
CAB-V35MT-3M	S-CS35M-3M
CAB-V35FT-3M	S-CS35F-3M
CAB-232MT-3M	S-CS232M-3M
CAB-449MT-3M	S-CS449M-3M
CAB-530MT-3M	S-CS530M-3M

S-CS232F-3M	DB-60 Male to DB-25 Female. Verified to EIA/TIA-232 Standard
S-CS232M-3M	DB-60 Male to DB-25 Male. Verified to EIA/TIA-232 Standard.
S-CS35F-3M	DB-60 Male to V.35 Female. Verified to V.35 Standard.
S-CS35M-3M	DB-60 Male to V.35 Male. Verified to V.35 Standard.
S-CS449M-3M	DB-60 Male to DB-37 Male. Verified to EIA/TIA-449 Standard
S-CS530M-3M	DB-60 Male to DB-25 Male. Verified to EIA-530 Standard.
S-CSVH26MM-(L)'	Smart Serial, VH26 M/M
S-CS60MM-(L)'	HD-60 M/M DTE/DCE

Available Footage (L): 1, 2, 6.

OTHER D-SUB CABLES

- DB37 pin or DB15 pin
- 26 AWG Stranded Conductor
- Full Length Mylar Foil Shield
- D-Sub Plugs w/Grounding Indents
- Molded w/Thumb Screws




25 Pin Male to HiDen 44 Pin Female

S-25M44F-3'

High Density 26 Pin Male to Female

S-H26MF-6'

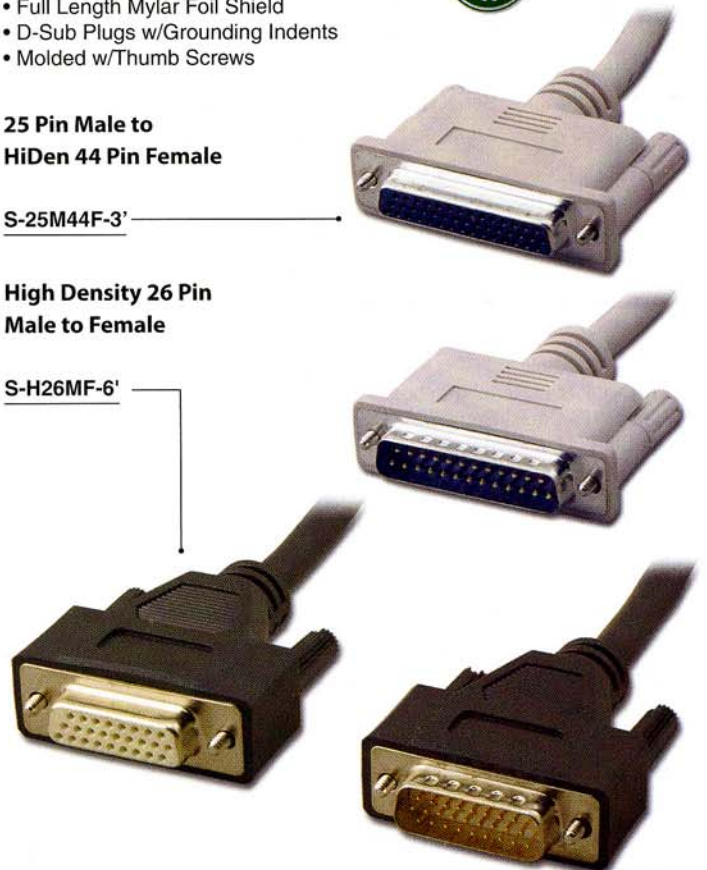





COMPUTER CABLE ASSEMBLIES

OTHER D-SUB CABLES

- DB37 pin or DB15 pin
- 26 AWG Stranded Conductor
- Full Length Mylar Foil Shield
- D-Sub Plugs w/Grounding Indents
- Molded w/Thumb Screws



S-15MF-3'	15 Pin Male to Female
S-15MF-6'	15 Pin Extension Cable
S-15MF-10'	
S-15MF-15'	
S-15MF-25'	
S-15MM-6'	15 Pin Male to Male Cable
S-15MM-10'	
S-15MM-15'	
S-37MF-10'	37 Pin Extension Cable
S-37MF-10TW	37 Pin Male to Female Cable, Twisted Pair Double shielded with Drain wire
S-37MM-10TW	37 Pin Male to Male Cable, Twisted Pair Double shielded with Drain wire
S-37MM-10'	37 Pin Male to Male Cable

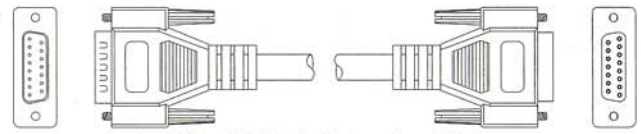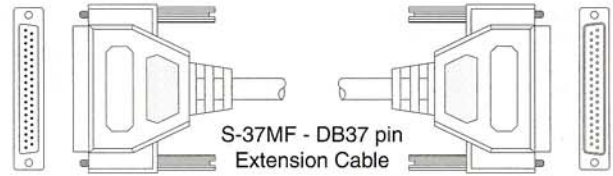

Mac SERIAL CABLES

- Mini Din 8 Pin Apple Connections
- Regular Wiring for Printing Application; Straight Thru Wiring, Wired Pin to Pin, for Switch Box Application. (See Below)
- Molded, Shielded, 26AWG Conductors
- **Special Wiring Available, Please Call**




S-25MD8



S-25MD8-10'	DB25 Male to Mini Din 8 Pin Male, 10ft
S-25MD8-10'-MH	Mac to Hayes and Compatible Modem Cable
S-25MD8-10'-LZ	Mac to HP & Compatible Laser Printer Serial Cable
S-25MD8-10'-SI	Apple II, IIe, II+ to Image Writer Cable

PIN OUT

Standard		LZ		MH		SI	
DB25P	MD8P	DB25P	MD8P	DB25P	MD8P	DB25P	MD8P
SHELL	SHELL	1	SHELL	1	SHELL	1	SHELL
1	1	2	3	2	3	2	3
2	2	3	5	3	5	3	5
3	3	4	1	5	2	7	4
4	4	5	2	7	4	7	8
10	5	7	4	20	1	8	2
23	6	7	8			20	1
24	7	20	1				
25	8						

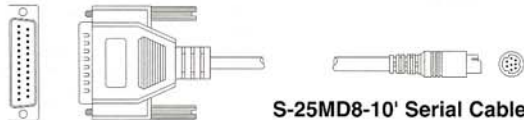


S-25MD8-10' Serial Cable

Mac DIN CABLES

- Mini Din 3: Apple Talk
- Mini Din 4: Mac Serial (Keyboard & Mouse); for Super VHS Cable, **See MMA-SVHS-XX pg. 6**
- Mini Din 8: Mac Printer, etc
- Mini Din 8: **Regular Wiring** for Printing Application; **Straight Thru Wiring**, Wired Pin to Pin, for Switch Box Application. (See Figure)
- Molded, Shielded, 26AWG Conductors


S-3MDM-10'	3 Pin Mini Din Male to Male Cable
S-3MDM/F-10'	3 Pin Mini Din Male to Female Extension Cable
S-4MDM-10'	4 Pin Mini Din Male to Male Cable
S-4MDM/F-6'	4 Pin Mini Din Male to Female Extension Cable
S-4MDM/F-10'	
S-8MDM-6'	8 Pin Mini Din Male to Male Cable
S-8MDM-10'	Mirror image Pin-Out
S-8MDM-25'	
S-8MDM-3'ST	8 Pin Mini Din Male to Male, Straight Thru Cable
S-8MDM-6'ST	
S-8MDM-10'ST	

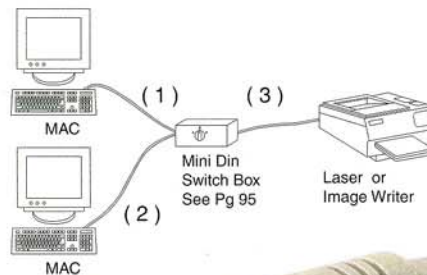

- (1) & (2) use ST Wiring (S-8MDM-6'ST or 10'ST)
- (3) use regular Wiring (S-8MDM-6' or 10')




S-8MDM



IEEE PRINTER CABLES

- For All IEEE-1284 Required Printers & Peripherals.
- Soft and Flexible Jacket.
- 28AWG, Twisted Pair
- Double Shielded

A Stands for DB25/M
B Stands for C36/M
C Stands for HPC36/M



S-IEEE-1284-AA(LL)'B DB25 Male to Male (Length in Feet)

LL= Length(ft): 3, 6, 10, 15, 25.

S-IEEE-1284-AB(LL)'B DB25 Male To Centronic 36 Male,

Printer Cable (Length in Feet)

LL= Length(ft): 3, 6, 10, 15, 25.

S-IEEE-1284-AAF(LL)'B DB25 Male to DB25 Female Extension Cable (Length in Feet)

LL= Length(ft): 3, 6, 10, 15, 25.

S-IEEE-1284-AC(LL)' DB25 Male to Half Pitch Centronic 36

Male (Length in Feet)

LL= Length(ft): 3, 6, 10, 15, 25.

S-IEEE-1284-BC(LL)' Centronic 36 Male to Half Pitch


Centronic 36 Male (Length in Feet)

LL= Length(ft): 3, 6, 10.

S-IEEE-1284-CC(LL)' Half Pitch Centronic 36 Male to Male

(Length in Feet)

LL= Length(ft): 3, 6, 10.

 Please Call for Custom Length




S-IEEE-1284-ABLLB

KEYBOARD & MOUSE CABLE


- Din 5 Pin or Mini Din 6 Pin
- AT, PS-2 Type Keyboard or Mouse Extension Cable
- MIDI Cable (Music Instrument Digital Interface)
- Molded Shielded, 26 AWG Conductors Wired Straight Through


AT type Keyboard Extension Cables

S-5DK-6'	Male to Female Coiled, Black Cable
S-5DMF-6'G	Male to Female Non-Coil Gray Cable
S-5DMF-10'G	 Male to Female Non-Coil Gray Keyboard Cable
S-5DMM-6'G	Male to Male Non-Coil Gray MIDI Cable
S-5DMM-10'G	
S-5DMM-25'G	




PS2 To AT Keyboard Adaptor Cords, Din to Mini-Din

S-ATK-6"	PS-2 Keyboard to AT Adaptor Cord, 5D/M-MD6/F, 6 in
S-PS-2-6"	AT Keyboard to PS-2 Adaptor Cord, 5D/F-MD6/M, 6 in 
S-UNVKY-1'	Universal Keyboard Adaptor Cord, 1 ft →



PS2 Type Keyboard & Mouse Extension Cables


S-6MDM-(LL)'	6 Pin Mini Din Male to Male Cable LL= Length(ft): 6, 10, 15, 25, 50.
S-6MDM/5DM-6'	6 Pin Mini Din to 5 Pin Din Cable
S-6MDM/5DM-10'	
S-6MDM/F-(LL)'	6 Pin Mini Din Male to Female Extension Cable LL= Length(ft): 8", 3, 6, 10, 15, 25. 
M-6MDM/F-06'M	28 AWG
M-6MDM/F-10'M	28 AWG
S-9M/MD6M-6"	Mouse Port Adaptor Cable 6"

AC POWER CORDS

- DC Adaptor Extension from Outlet.
- Fit on Power Strip.
- Duplicate Power Port.
- UL Rated.

S-PWR-MF-12"

S-PWR-MFX2-12"

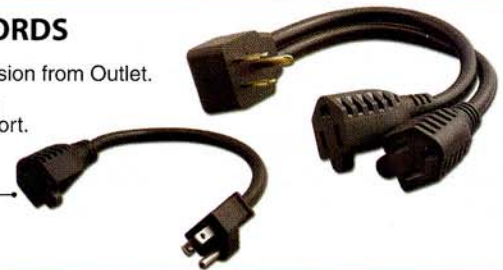

PC POWER CORDS

- All UL, CSA Listed Cables
- 60°C 18/3 AWG Conductors
- Choice of Gray (G) or Black (BK)
- Different lengths available

S-EXT-MFX2-12"

S-EXT-(LL)'BK

S-EXT-(LL)'G

S-PSC-(LL)'BK

S-PSC-(LL)'G

S-PWR-(LL)'BK

S-PWR-(LL)'G

LL= Length(ft): 6, 12.

S-PWR/F-18"

S-PWR/F-3'

S-PWR/F-6'



S-PWR/F-3' Monitor to Computer




COMPUTER CABLE ASSEMBLIES

AT SERIAL ADAPTOR CABLES

- RS232 25Pin to 9 Pin
- Adapts Serial Port to RS232 Devices, i.e Modems, Printers
- Molded w/ Thumb Screws
- 9 Wires; 28 AWG Stranded Conductors
- Full Length Mylar Foil Shielded



M-9F25M-06'M
M-9F25M-10'M

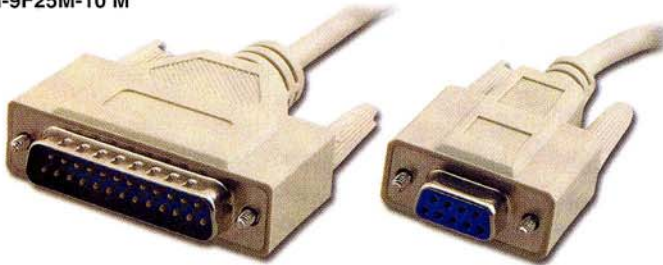

RS232 9 PIN CABLES (Serial)

- RS232 Dual 9 Pin
- Molded w/ Thumb Screw
- Full Length Mylar Foil Shield
- Fully Wired Straight Thru, 28 AWG Stranded Conductors
- For PC Serial Port and/or RS232 Type Applications
- Ground Indented D-SUB plugs



M-9FF-06'M **M-9MM-06'M** **M-9MF-06'M**
M-9FF-10'M **M-9MM-10'M** **M-9MF-10'M**
M-9FF-15'M



M-9MF-xx'M

LAP LINK CABLES

- A Cable used to connect two computers so that one can access data, run programs and transfer files form one computer to another
- Used for Parallel File Transfer

M-25MM-06'LPL
M-25MM-10'LPL
M-25MM-15'LPL
M-25MM-25'LPL



Centronic & PS2 Type Extension Cables


- Centronic 36 Pin Connectors
- Full 36 Conductors; Wired Straight Through
- 28 AWG Stranded Conductors
- Molded, Mylar Foil Shielded Cable



M-36MM-06'M

- 6 Pin MiniDIn Male to Female Extension Cable

M-6MDM/F-06'M
M-6MDM/F-10'M



PARALLEL PRINTER CABLES

- RS232 25 Pin Male to Centronic 36 Pin Male
- Molded w/ Thumb Screw
- Full Length Mylar Foil Shield
- 25 Wires; 28 AWG Stranded Conductors, an absolute must for bidirectional parallel port
- Ground Indented D-SUB Connectors



M-36M25M-06M
M-36M25M-10M
M-36M25M-6M-FR*
*(Cable with Ferrite)

Molded (18C)

M-IBM-06'M
M-IBM-10'M




RS232 25 PIN CABLES (Serial)

- RS232 Dual 25 Pin
- Molded w/ Thumb Screw
- Full Length Mylar Foil Shield
- Fully Wired Straight Thru, 28 AWG Stranded Conductors
- For PC Serial Port and/or RS232 Type Applications
- Ground Indented D-Sub Plugs



M-25MF-06'M
M-25MF-10'M
M-25MF-25'M

M-25MM-06'M
M-25MM-10'M
M-25MM-25'M

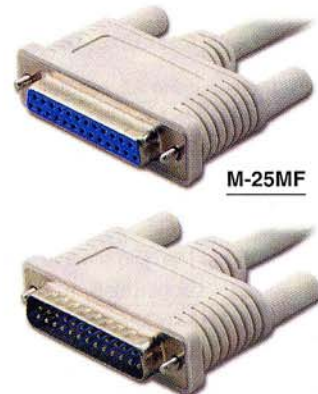

M-25MF

Wiring:

From 25 Male Pin #	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
To 25 Male Pin #	1	15	13	12	10	11	7	8	9	5	6	4	3	14	2	16	17	18	19	20	21	22	25	24	25