



## PC CARD ADAPTOR CORDS

• All: Made with RG-316, 12" Cord

- CAC-1600** MC Card Right Angle Plug to Open End.
- CAC-1611** MC Card Right Angle Plug to MCX Plug.
- CAC-1621** MC Card Right Angle Plug to Mini-MCX Plug.
- CAC-1630** MC Card Right Angle Plug to "N" Bulkhead Jack.
- CAC-1631** MC Card Right Angle Plug to "N" Plug.
- CAC-1641** MC Card Right Angle Plug to SMA Plug.
- CAC-1651** MC Card Right Angle Plug to SMB Plug.




## PCI IEEE 1394 CARD

- Adds IEEE 1394 capability to computers.
- Supports PCI Bus Power Management Interface Specification V1.1.
- Compliant with PCI Local Bus Specification Revision 2.1.
- Compliant with 1394 OHCI Specification revision 1.1.
- Compliant with IEEE 1394A proposed 3.0.
- Interoperable across 1394 cable with 1394 physical layers (PHY) using 5V supplies.
- Separate cable bias and drives termination voltage supply for each port.
- 32-Bit / 33Mhz operation.
- Hot-swappable and real plug and play capability.
- Connects up to 63 devices.
- Two external 6C ports and one external 4C port; One internal 6C port.

**INT-PCI-1394**

**INT-PCI-1394A3+1**

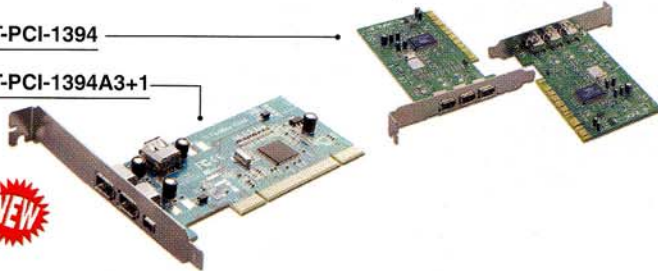


## PCMCIA ADAPTERS

• Adds more ports to laptop computers.

**PCM-1394A-2** 1394 6 Pin Card BUS Adaptor.

**PCM-D9MS-2** DB9 Male Serial Port Card BUS Adaptor.

**PCM-USB-204A** USB 2.0 Serial Port Card BUS Adaptor.

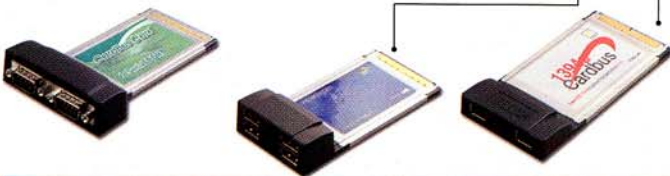

## SIAMESE CABLE


- 20 AWG Solid Bare Copper Center RG-59.
- 98% Bare Copper Braid.
- 18AWG Stranded Twisted Pair.
- Gas Injected Foam Insulation.
- UL CL2 Rated, UV Jacket.

**PCC-59227** Black, 500ft. Reel Box.

**PCC-59228** Black, 1000ft. Roll in Box.

**PCC-59229** White, 500ft. Reel Box.

**PCC-59231** White, 1000ft. Roll in Box.




## PCI to USB v2.0 CARDS



- Adds more USB ports to computers.
- Compliant with Universal Serial Bus Specification Revision 1.1 and 2.0.
- Plug and play capability.
- Connects up to 127 devices in a tiered star configuration.
- Up to 480 Mbps data transfer rate.
- 32-bit 33Mhz host interface compliant to PCI specification release 2.2.
- Supports both PC and MAC.

**INT-PCI-USB20-5** 1 Internal and 4 External USB Ports.

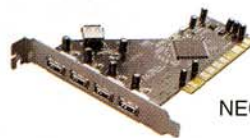

NEC Chipset



VIA Chipset

**INT-PCI-USB20-2** 2 External USB Ports.



ALI Chipset

## SERIAL ATA CARD

- Adds high speed SATA capability to your computer.
- Up to 1.5Gbps data transfer rate
- Supports two SATA ports
- SATA 1.0 compliant



**INT-PCI-SAT121X**



## COAX BULK CABLES

- 1000 ft. Reel Boxes.
- Gas Injected Foam Insulation.
- UL Rated, UV Jacket.



**PCC-59200** 20 AWG BC Center RG-59, 98% BC-Braid, Black.

**PCC-66800** 18 AWG CCS Solid RG-6, 60% Braid+Foil, Black.

**PCC-66801** 18 AWG CCS Solid RG-6, 60% Braid+Foil, White.

**PCC-66840** 18 AWG CCS RG-6Quad, 60/42% Braid+Foil, Black.

**PCC-66841** 18 AWG CCS RG-6Quad, 60/42% Braid+Foil, White.

**PCC-58165** 20 AWG RG-58, TC+55% Braid+Foil, Black.

**PCC-58190** 20 AWG RG-58, BC CTR/CCA 55% Braid+Foil, Black.

**PCC-58208** 18 AWG RG-58, BC+98% Braid, Black.

**PCC-66810** 18 AWG RG-6, 60% BC-Solid, Braid+Foil, Black.

**PCC-66811** 18 AWG RG-6, 60% BC-Solid, Braid+Foil, White.

