


LED LIGHTED USB CABLES

- USB v2.0
- Clear LED Embedded Body.
- Gold Plated Contacts.
- Sealed Blister.
- USB A Blue LED Light.
- USB B Red LED Light.

S-USBAB-(LL)-L-P

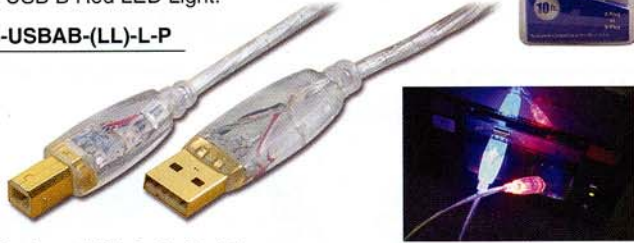

LL= Length(ft): 3, 6, 10, 15.

USB CABLES

- USB v2.0
- Gold Plated Body and Contact.
- Color Coded Connectors.
- 20 AWG Power Pair
- Sealed Blister


S-USBAA0-(LL)-P

S-USBAB0-(LL)-P

LL= Length(ft): 3, 6, 10, 15.

S-USBAMF0-(LL)-P

LL= Length(ft): 3, 6, 10.

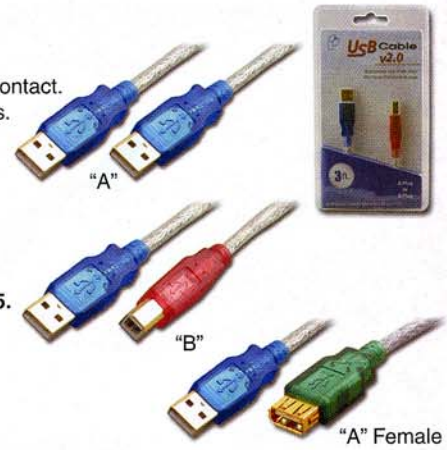

USB CABLES

- USB v2.0
- Gold Plated Contacts.
- 22 AWG Power Pair, 28 AWG Signal Pair.

S-USBAA2-(LL)' USB A To A

LL= Length(ft): 18", 3, 6, 10, 15.



USB A To B, 22 AWG Power Pair

S-USBAB2-(LL)'

LL= Length(ft): 18", 3, 6, 10, 15.



Black

S-USBAB2-06BK

S-USBAB2-10BK



- UL Listed, USB v2.0
- 20 AWG Power Pair
- 28 AWG Signal Pair


S-USBAA0-5'




USB A Plug To A Jack, 22 AWG Power Pair

S-USBAMF2-(LL)'

LL= Length(ft): 8", 3, 6, 10.

 See Pg 98 for Bracket



S-USBAMF2-8NB

LL= Length(ft): 8".



USB B To B, 22 AWG Power Pair

S-USBBB2-(LL)'

LL= Length(ft): 3, 6, 10, 15.



USB A To B, 24 AWG Power Pair

M-USBAB4-(LL)'

LL= Length(ft): 3, 6, 10.



USB A Plug To A Jack, 24 AWG Power Pair

M-USBAMF4-06'



EZ USB CABLES

- Stretched (Up to 34") and Zipped.
- Gold Plated Contacts.

S-EZUSB-AA USB A Male to A Male

S-EZUSB-AB USB A Male to B Male

S-EZUSB-A5MN USB A Male to 5 Pin Mini USB


S-EZUSB-AMF USB A Male to A Female Extension Cable



Travel Computer Cable

- Portable bi-directional flex computer signal cable.
- RJ-45 (Network) + RJ-11 (Voice/Dial Up).

S-EZUSB-45+11

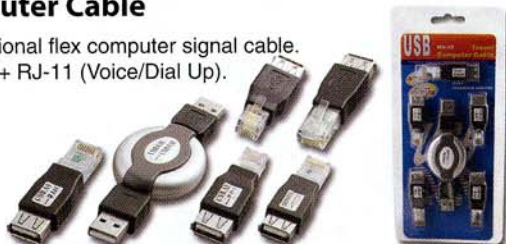

EZ USB-DC POWER CABLES

- Stretched (Up to 34") and Zipped.

S-EZUSBDC-A1.1 DC-Power 1.1

S-EZUSBDC-A1.35 DC-Power 1.35

S-EZUSBDC-A2.1 DC-Power 2.1

S-EZUSBDC-A2.5 DC-Power 2.5

S-EZUSBDC-A3.5 DC-Power 3.5



USB MINI CONNECTOR CABLES

- Used Mostly in Digital Camera and Other Space Limited Appliance and Applications
- USB A Plug to Mini B Plug, 28 AWG Power Pair

Digital Camera:

Brand	Model
• Sony	(DSC-S85) • (MVC CD-300) (DSC-P50) • (MCV-FD92) (DSC-P30) (DSC-S50)
• Canon	(A-20) • (A-10)
• Richo	(RDC-1500)



NEW
Length

- S-USBABM81-8"
- S-USBABM81-22"
- S-USBABM81-5'



NEW

Digital Camera:

Brand	Model
• Olympus	(C-3040 200M) • (C-700 VITRA 200M)
• Kodak	(DC-4800) • (DX3500)
• Sony	(DSC-505V) • (S-70)
• Samsung	(210SE)



S-USBABM8-5'

- USB "A" Male to Female, 22 AWG Power Pair, Non Bracket.

S-USBAMF2-8NB

NEW



- Miniature/Gaming Device Data Transfer.


S-USBBM813-5'

NEW



- USB "A" Female to Micro "A" Plug.

S-USBAFUA-6"

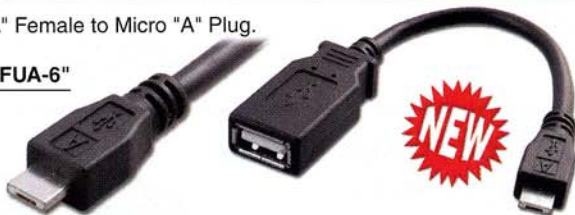

NEW

CAR CHARGER

- Car Charger Plug to USB "A" Female Adaptor.
- DC 5V, 400mA@ 12/24V Input.

CRC-USB-AFBK

NEW



POWER ONLY ADAPTOR

- USB "A" Male to Mini USB Male + USB "A" Male.

S-USBABM81+PWR



NEW

USB CELLPHONE CHARGER



CPC-USB-NK Nokia



CPC-USB-MT Motorola

Cell Phone Emergency Charger

- Quick Charge of Dead Cell Phone Battery.
- Various Adaptors for Different Brands.
- Use One AA Battery (Not Included).



CPC-AA-EMC



NEW

FLEX COMPUTER CHARGER KIT

- Multi Mobile Phone Charger.
- USB to Various Cell Power Input.

CPC-USB-KIT



NEW



IDE/SATA(ATAPI)/USB2.0 ADAPTER

- IDE to USB connection for hard drives and optical drives.
- SATA to USB connection for SATA hard drives.
- Supports 2.5 / 3.5 / 5.25 inch drives.
- USB plug and play adaptor.
- AC power adaptor included.



SATA Cable

NEW

ADL-USB-S+ATA



Driver



Regular to SATA Power Adaptor



USB to IDE/SATA Adaptor




Transformer

USB PORT ADAPTORS

- USB to Serial + Parallel Port Adaptor.
- Software CD Included.

ADL-USB-S+P

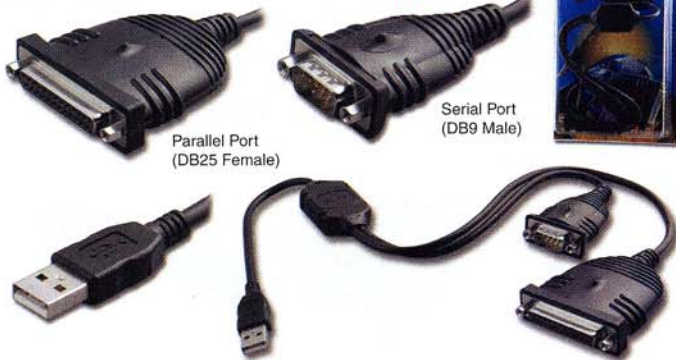

- USB Universal Plug Adaptor.

AD-USB-UPA



- Universal USB Cord + Adaptor Combo Set.

AD-USB-TRVKT



- Universal USB Cord Adaptor Combo
- USB Plug + Zip Cable Kit.

AD-USB-U-Z



USB P.C.B. SOCKETS


USB-PAF "A" Socket, Horizontal 90°

USB-PAF-R "A" Socket "Side Ways", 90°

USB-PAF-V "A" Socket, Vertical, 180°

USB-PAFX2 "A" Socket, Stacked Dual, 90°

USB-PBF "B" Socket, 90°

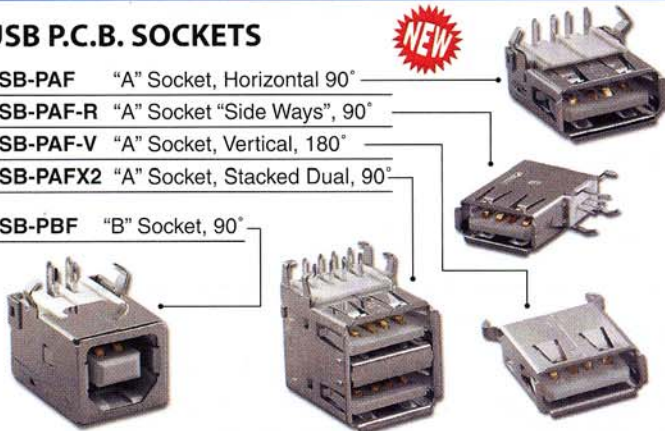

USB SWITCH BOXES

ABM-USB-2B 2B In, 1A Out

ABM-USB-4B 4B In, 1A Out

ABM-USB-2 2-Way

ABM-USB-4 4-Way



USB PLUG "A" MALE ASSEMBLY SOLDER PIN

USM-AM-AS-BG Beige


USM-AM-AS-BK Black



USB BRACKET

- Dual Port with Bracket,
- To main Board's USB Connection
- USB A Type Jack

BRK-USB-AA2

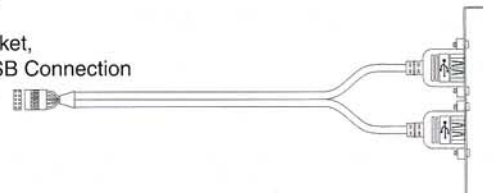

USB HOST CARD

- Add 2 USB root-HUB Ports to Desktop PC
- Maximum 500mA Power Current on Each Port
- Over Current Protection
- Full-Speed and Low-Speed Transfer Rate
- Chains Up to 127 USB Devices
- Windows 98 Device Drivers Automatic Installation
- Truly Plug & Play Automatic System Configuration
- USB and ACPI Compliant



INT-PCI-USB USB Ports Host Interface Card (PCI)

INT-PCI-USB-V2.0 USB 2.0 5 Ports Host Interface Card (PCI)

USB BULK CABLE

- 250ft. Roll
- UL Rated.

MCC-USB-0-250 20 AWG Power, 28 AWG Signal

MCC-USB-2-250 22 AWG Power, 28 AWG Signal

MCC-USB-4-250 24 AWG Power, 28 AWG Signal

MCC-USB-6-250 26 AWG Power, 28 AWG Signal

MCC-USB-8-250 28 AWG Power, 28 AWG Signal



USB HUB

The electronic interface between devices

- Automatically select self-powered or bus-powered model Easy installation of large range self-powered mode
- Surge Protection
- Automatically hand USB protocol
- Support both full speed and low speed devices
- Downstream ports have automatic packet connectivity and speed detection functions
- Higher than 8KV in-circuit ESD protection 8 Advanced USB downstream connection indicators that blink during data transmission
- Compatible with Windows 95, OSR 2.1, Windows 9.8 beta

HUB-USB-2A 1 Host to 2 Devices; 70 x 50 x 25 mm
Pocket Style two port HUB. Designed especially for travellers.
Used with Note-book Computer for USB system peripheral accessories connection.

HUB-USB2.0-4A USB V2.0 HUB 1 Port to 4 Ports A
HUB-USB-5A 1 Host to 5 Devices; 125 x 85 x 30 mm
HUB-USB-7A 1 Host to 7 Devices; 125 x 85 x 30 mm



HUB-USB2-4AUC V2.0 Ultra Compact, 4 Port HUB
HUB-USB2-4AUT V2.0 Ultra Compact, 4 Port HUB with DC Adaptor
HUB-USB-MNI-4AN Mini USB Hub, 4 Port with Extension

USB to MINI B ADAPTORS

AD-USB-AFBF81 Type A Female To Mini B (5C) Female
AD-USB-AFBM81 Type A Female To Mini B (5C) Male
AD-USB-AMBF81 Type A Male To Mini B (5C) Female
AD-USB-AMBM81 Type A Male To Mini B (5C) Male
AD-USB-AMBM82 Type A Male To Mini B (8C) Male



USB To IEEE-1284 PRINTER CABLE

- Full compliance with the USB spec. 1.0
- Low power consumption and is powered from USB connection.
- Full compatible USB host device drivers available
- Transparent fully automatic support for true bidirectional communication
- Hardware initiates and manages automatic negotiation for the fastest protocol available
- Supports standard PC parallel port register-based operation
- Supports multiple logical channels
- Maximum throughput: 1,216 Mbytes/s (ECP mode)
- Allows current Microsoft windows printer drivers to print seamlessly to USB
- Fully Plug & Play compatible




AD-USB-C36M

FUNCTION	DESCRIPTIONS
Power Supply	BUS Power from USB Cable
Voltage	+5V
Current	80mA (Max.)
Cable Length	6ft. (180 cm) AWG 28/24
Input Connector	USB Type A Plug
Output Connector	Centronics, 36 Pin Male
Operation Temperature	5°C ~ 40°C
Stock Temperature	-20°C ~ 60°C
Humidity	20% ~ 80% RH, Non-Condensing
Enclosure	Plastic
Weight	110g
Dimension	43 x 53 x 19.5 (mm)

USB ADAPTORS

AD-USB-AFMD6M USB Type A Female To PS2 Male
AD-USB-AM/MD6F USB Type A Male To PS2 Female
AD-USB-AFBF USB Type A Female To Type B Female
AD-USB-AFBM USB Type A Female To Type B Male
AD-USB-AMBF USB Type A Male To Type B Female
AD-USB-AFF USB Type A Female To Type A Female
AD-USB-AMF USB Type A Male To Type A Female
AD-USB-AMM USB Type A Male To Type A Male
AD-USB-BFF USB Type B Female To Type B Female
AD-USB-BMM USB Type B Male To Type B Male

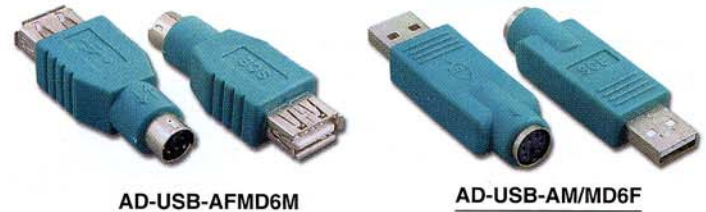

QUAD 3.5 to USB ADAPTOR

- Data Transfer/Charging adaptor for MP3 players.

AD-USB-3.5Q

