

D - SUB & CENTRONIC CONNECTORS


CENTRONIC PCB MOUNT

- PBT insulator
- Tin Plated Shell
- Female w/ Bail Lock

Male 57-10(XX)0PCB

Female 57-20(XX)0PCB

XX= Pins: 14, 24, 36, 50.

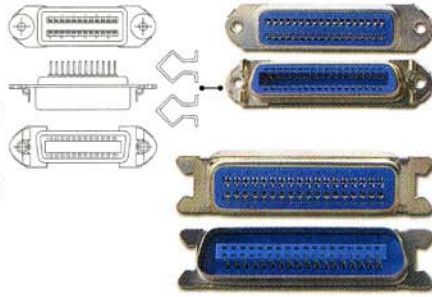

57-20360PCB-D 36/F PCB W/4-40 screw

57-10360PCB

STRAIGHT EDGE

- N-Stand for Straight Edge

Male 57-10(XX)0PCB-N

XX= Pins: 14, 24, 36, 50.

Female 57-20(XX)0PCB-N

XX= Pins: 14, 24, 50.

RIGHT ANGLE


- Female w/ Bail Lock
- Gold Plated Contacts
- Blue Plastic Fillings

Male 57-(XX)PR

XX= Pins: 14, 36, 50.

Female 57-(XX)SR

XX= Pins: 14, 24, 36, 50.

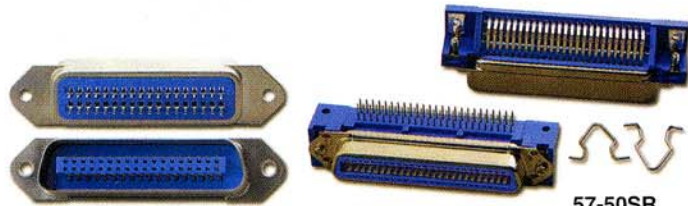

57-10360PCB-N

57-50SR

TELCO & CEN 36 RIGHT ANGLE SOLDER

- Metal or Plastic Shell
- 50 Pin, Gold Plated Contacts
- Right Angle Cable Entry
- Screw Strain Relief

Male 57F-50MR-TLCO

Female 57F-50FR-TLCO



Solder Type

Male 55-36M


Female 55-36F

Metal Hood 55-50M/T


Female 55-50F/T

Reversed 55-50M/T-RV

Female 55-50F/T-RV



DC-TELCO-BRK




55-50M/T

IEEE-488 CONNECTOR

- Connector Kit for IEEE-488 Cable

I3E-488

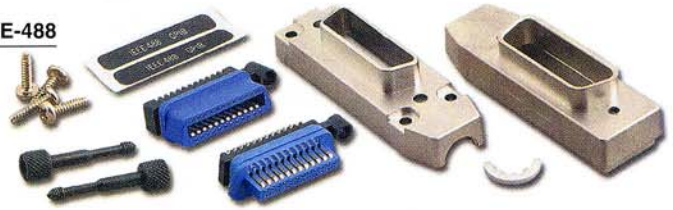

HIGH DENSITY, SOLDER TYPE

- All Tin Plated Shells
- All Plugs with Grounding Indents On Shells
- Gold Plated Contacts
- White Plastic Fillings

Male

Female

DHS-15P

DHS-15S

DHS-26P

DHS-26S

DHS-44P

DHS-44S

DHS-62P

DHS-62S

DHS-78P

DHS-78S



DHS-15S



See Pg 116 for Hood Used on the Connector

SOLDER TYPE

- Nickel Plated Steel Shell
- Female w/ Bail Locks
- Gold Plated Contacts
- Panel Mount style on male only

Male

Female

57-10140

57-40140

57-10240

57-40240

57-10360

57-40360

57-10500

57-40500



57-10500



57-40500

SOLDER TYPE WITH METAL HOOD (180°)

- Nickel Plated Steel Hood
- Gold Plated Contacts
- Blue Plastic Fillings
- Rubber Tube Strain Relief Included

Male

Female

57-30140

57-60140

57-30240

57-60360

57-30360

57-60500

57-30500



57-30360



D - SUB CONNECTORS & CRIMPING TOOLS

CRIMP HOUSING, ZINC PLATED

- Black Plastic Fillings

Male DH-(XX)HP

Female DH-(XX)HS

XX= Pins: 9, 15, 25, 37.



CRIMP HOUSING, TIN PLATED

- All Plugs with Grounding Indents On Shells
- Black Plastic Fillings

Male DH-(XX)HP/T

Female DH-(XX)HS/T

XX= Pins: 9, 15, 25, 37, 50.



CRIMP HOUSING HIGH DENSITY

- All Tin Plated Shells
- All Plugs with Grounding Indents On Shells
- All Pins Gold Plated
- Black Plastic Fillings

Male DHD-(XX)HP

Female DHD-(XX)HS

XX= Pins: 15, 26, 44, 62, 78.



CRIMP HOUSING, TIN PLATED

- All Plugs with Grounding Indents On Shells
- UL-LISTED
- Black Plastic Fillings


Male DH-(XX)HP/T-RL

Female DH-(XX)HS/T-RL

XX= Pins: 9, 15, 25, 37, 50.




RL : Denotes RoHs compliance & UL Certified

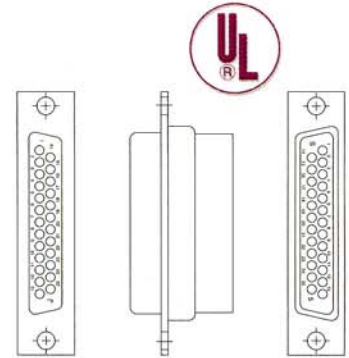


D-SUB COAX COMBO

- 13 Contacts, Crimp Ferrel Included
- Metal Tin Plated Shell
- Gold Plated Contacts




DS-13W3PCS D-sub 10 pin plug with 3 Coax socket



DS-13W-CS Coax socket for 13W3



DS-13W3SCP D-sub 10 pin socket with 3 Coax plug



DS-13W-CP Coax plug for 13W3

D-SUB CRIMPING TOOLS

PHT-DS-STMP: Crimping Tool for D-sub **Stamp** Type Pins. For Both **Regular** and **High Density** Type with Conductor Size Range of 20~24 AWG and 24~28



PHT-DS-MCH: Crimping Tool for **D-SUB Machine Pins**. Depth Adjustable, Ratchet and Four Way Indent



INSERT, EXTRACTION TOOLS

- Inserts and Extracts Crimp Pins. For Regular and High Density Type.

High Density



DHD-IN-EXT-H

Regular



DH-IN-EXT

CRIMP PINS

- All Pins Gold Plated
- All 100 pcs per Bag, Except On Reel, 5K per Reel



WIRE SIZE 24-28 AWG

Regular DH-PIN/F
DH-PIN/M

Machined* DH-PIN/F-MCH
DH-PIN/M-MCH

Crimp Only DH-PIN/M-MCH-C

On Reel DH-P/F-REEL
DH-P/M-REEL

DHD-PIN/F

DHD-PIN/M



DH-PIN/F-MCH



DH-PIN/M-MCH

* Machined pins allows both soldering and crimping

WIRE SIZE 24-28 AWG

Hi-Density Housing DHD-PIN/F-HR
DHD-PIN/M-HR

On Reel (5K/Reel) DHD-P/FH-REEL
DHD-P/MH-REEL

WIRE SIZE 20-24 AWG

Regular

DH-PIN/F-L
DH-PIN/M-L