


# MISCELLANEOUS HARDWARE & MINI DIN CONNECTORS


## RS 232 PIN JUMPERS

DH-JMP-MM	Male to Male
DH-JMP-FF	Female to Female
DH-JMP-MT	Male to Tined
DH-JMP-FT	Female to Tined
DH-JMP-MF	Male to Female
DH-JMP-YMM	Y-Jumper, M-M-M
DH-JMP-YFF	Y-Jumper, F-F-F
DH-JMP-YFMM	Y-Jumper, F to M-M
DH-JMP-YMFF	Y-Jumper, M to F-F




## MISCELLANEOUS

H-JMPLED	Jumper Load Wire 26 awg, 2", 50/ bag
H-CSR09/S	Metal Cord Strain Relief
H-CSR25/S	Set for DB9 hoods, 100/Bag
MD-MTLCH	Mini Din Strain Relief Metal Latch, 100/Bag



## THUMB SCREWS

- Machined Metal Screw
- 4-40 Thread
- Special Replacement for Regular Size Screw on DP-(XX) Hoods

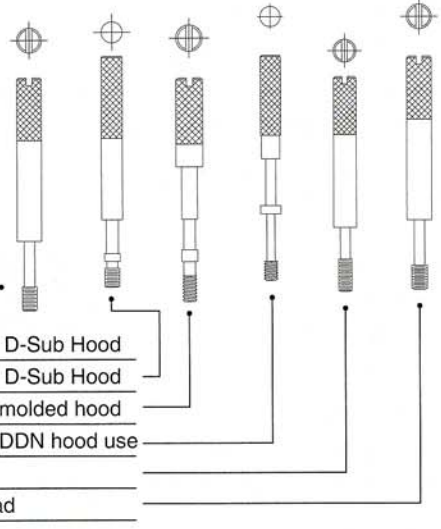

H-TS	4/40 Thread, for D-Sub Hood
H-TS-1	4/40 Thread, for D-Sub Hood
H-TS-2	4/40 Thread for molded hood
H-TS-3	4/40 Thread for DDN hood use
H-TS-4	4/40 Thread
H-TS-M3	M3 Metric Thread


## CAPTIVE SCREW & RETAINING CLIP

HRC-1	Include Retaining Clip and Captive Screw.
HRC-1/SET	Include 2 Retaining Clips and 2 Captive Screws.

ZMT-H-CS	4/40 Captive Screw
ZMT-H-FW	Flat Washer for #4 Screw
ZMT-H-HLS 7.92	4/40 Hex Locking Screw 7.92mm Thread
ZMT-H-HLS 10.9	4/40 Hex Locking Screw 10.9mm Thread
ZMT-H-HLS 14.22	4/40 Hex Locking Screw 14.22mm Thread
ZMT-H-HN	4/40 Hex Nut
ZMT-H-RC	Retaining Clip for #4 Screw
ZMT-H-S	4/40 Screw for H-SET-9C, 25C, 25C/S
ZMT-H-SAW	Saddle Washer
ZMT-H-SPW	Split Washer for #4 Screw
ZMT-H-SS	4/40 Shoulder Screw. Half Threaded
ZMT-H-PSRS	Platic Strain Relief Screw
ZMT-HTS-ADM25-L-GR	4/40 Shoulder Screw for ADM-25

## BAIL LOCK & BARREL NUTS


H-BL	Bail Locks for Centronic Connector
H-BN	4/40 Barrel nuts, 6mm.
H-BN1	4/40, 8mm.

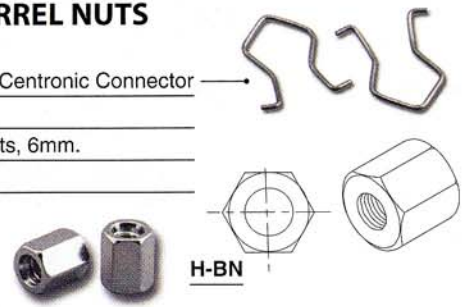

## MINI DIN DUST COVERS

- Protects Connector from Dust and/or Moisture
- Flexible Translucent Plastic

DST-MD8P	for 3 to 8 pin
DST-MD9P	for 9 pin



## CHASSIS MOUNT MINI DIN SOCKET

- Solder Cup
- Plastic or Metal Mounting Base




Plastic Mounting Base, A=20mm Distance

MD-65000-(X)S	X= Contacts: 3, 4, 5, 6, 7, 8.
---------------	--------------------------------

MD-67000-6S

Metal Mounting Base, Hole to Hole Distance B=30 mm

MD-67000-(X)S	X= Contacts: 3, 4, 5, 6, 7, 8, 9.
---------------	-----------------------------------

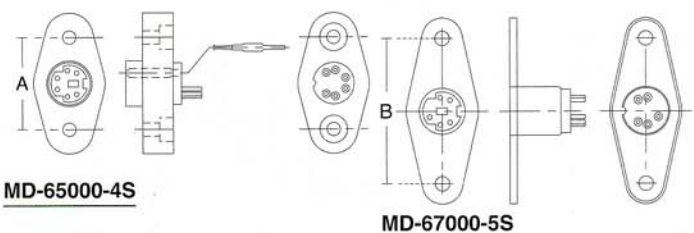

# MINI DIN & DIN CONNECTORS

## DIN PLUGS, PLASTIC JACKET

- Assembly Type, Solder Cup Contacts, Complete with Strain Relief and Jacket
- Standard Solder Cup

- DIN-46000-3P
- DIN-46000-4P
- DIN-46000-5P (180°)
- DIN-46000-6P
- DIN-46000-7P
- DIN-46000-8P (270°)
- DIN-46000-8P-262
- DIN-46000-13P



- DIN-46000-5P2 Solder Cup 240 degrees
- DIN-46000-5P3 Solder Cup 360 degrees

See Page 121 for Hole Pattern

## DIN SOCKET, PLASTIC JACKET

- Assembly Type, Solder Cup Contacts, Complete with Strain Relief & Jacket
- Standard Solder Cup

- DIN-46100-3S
- DIN-46100-4S
- DIN-46100-5S
- DIN-46100-6S
- DIN-46100-7S
- DIN-46100-8S (270°)
- DIN-46100-8S-262
- DIN-46100-13S



- DIN-46100-5S2 Solder Cup 240 degrees
- DIN-46100-5S3 Solder Cup 360 degrees

## DIN PLUG, METAL SHELL

- Assembly Type, Solder Cup
- Tin Plated, Metal Cable Lock
- Rubber Strain Relief

- DIN-36000-3P
- DIN-36000-5P (180°)
- DIN-36000-6P
- DIN-36000-7P
- DIN-36000-8P (270°)



## DIN SOCKET, METAL SHELL

- Assembly Type, Solder Cup
- Tin Plated, Metal Cable Lock
- Rubber Strain Relief

- DIN-36015-3S
- DIN-36015-5S
- DIN-36015-6S
- DIN-36015-7S
- DIN-36015-8S (270°)



## CHASSIS MOUNT DIN SOCKET

- Chassis Mount Din Sockets
- Solder Plugs for Solid Contact
- Standard Solder Cup

- DIN-54000-3S
- DIN-54000-4S
- DIN-54000-5S (180°)
- DIN-54000-6S
- DIN-54000-7S
- DIN-54000-8S (270°)
- DIN-54000-8S-262



- DIN-54000-5S2 Solder Cup 240 degrees

See Previous Page for Mini Din Panel Mount

## DIN PLUG & SOCKET, MOLDING TYPE

- DIN-47000-5S
- DIN-47000-5P
- DIN-47000-7P
- DIN-47000-8P (270°)



DIN-47000-5S

## MINI DIN CONNECTORS

- Color Coded for Mouse or Keyboard.

- MD-6P-GN
- MD-6P-VL



- Assembly Type, Solder Cup Contacts, Jacket

- Male MD-(X)P
- Female MD-(X)S


X= Contacts: 3, 4, 5, 6, 7, 8, 9.

MD-4P



MD-4S

- MD-MTLCH Mini Din Strain Relief Metal Latch



## DUAL MD6 JACK

- For PS2: Keyboard & Mouse
- 90 Degree
- Double Shield

- MD-26400-6SS-KM
- MD-26400-6SS



## SVHS CONNECTORS

- SVHS Solder Type Assembly
- Teflon (High Temp) Insulation

- MD-SVHS-P65 Plug
- MD-SVHS-J65 Jack



Complete Connector Kit

Connector Tip

- Replacement Metal Back Hood with Various Inside Diameters

- RBC-A175 I.D.= 7.5mm.
- RBC-A180 I.D.= 8.0mm.

- RBC-A165PW Pearl White Hood I.D.= 6.5mm.
- RBC-A175PW Pearl White Hood I.D.= 7.5mm.
- RBC-A180PW Pearl White Hood I.D.= 8.0mm.

