


**CORRUGATED TUBING**

- Slit and Not Slit models route wires and harnesses.
- Provides extra protection from abrasion, impact, and weather elements.
- Applications include: vehicular, machinery, communication and computer equipment.

- Temperature Range:  
 Polyethylene -40°F to 200°F (-40°C to 93°C)  
 Nylon -40°F to 300°F (-40°C to 149°C)

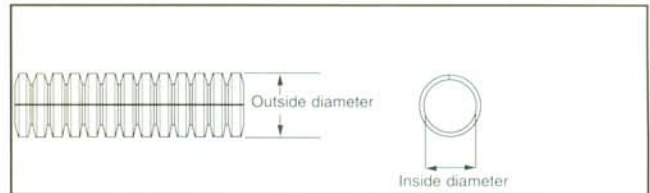

**Ordering Information**

**Materials:** Available in polyethylene and nylon, slit and not slit.

**Colors:** Standard color for polyethylene is black. Specify, when ordering, for nylon in black with gray stripe.

**Corrugated Tubing**

Not Slit Model No.	Slit Model No.	Nominal Size		Inside Diameter		Outside Diameter		Standard Reel Length		Bulk Reel Length	
		In.	(mm)	In.	(mm)	In.	(mm)	Ft.	(m)	Ft.	(m)
<b>Polyethylene or Nylon</b>											
COT-250	COTS-250	.250	(6.4)	.242	(6.1)	.397	(10.1)	100	(30.3)	3,200	(969.7)
COT-375	COTS-375	.375	(9.5)	.347	(8.8)	.514	(13.1)	100	(30.3)	2,000	(606.1)
COT-438	COTS-438	.438	(11.1)	.403	(10.2)	.590	(15.0)	100	(30.3)	1,600	(484.9)
COT-500	COTS-500	.500	(12.7)	.481	(12.2)	.688	(17.5)	100	(30.3)	1,200	(363.6)
COT-625	COTS-625	.625	(15.9)	.598	(15.2)	.827	(21.0)	100	(30.3)	900	(272.7)
COT-750	COTS-750	.750	(19.1)	.724	(18.4)	.976	(24.8)	100	(30.3)	600	(181.8)
COT-875	COTS-875	.875	(22.2)	.840	(21.3)	1.140	(29.0)	50	(15.2)	450	(136.4)
COT-1000	COTS-1000	1.000	(25.4)	.976	(24.8)	1.284	(32.6)	50	(15.2)	350	(106.1)
COT-1125	COTS-1125	1.125	(28.6)	1.092	(27.7)	1.360	(34.5)	N/A		300	(90.9)
COT-1250	COTS-1250	1.250	(31.8)	1.198	(30.4)	1.470	(37.3)	N/A		300	(90.9)
COT-1500	COTS-1500	1.500	(38.1)	1.540	(39.1)	1.900	(48.3)	N/A		150	(45.5)
COT-2000	COTS-2000	2.000	(50.8)	1.980	(50.3)	2.400	(61.0)	N/A		100	(30.3)