


HEAT SHRINK TUBING

- Made of crosslinked flexible polyolefin.
- Shrink ratio: 2:1.
- Designed to insulate, protect and manage wires.
- Useful temperature range: -67° F to 275° F (-55° C to 135° C).
- MIL-1-23053/5.
- 600-volt rating.
- UL recognized, CSA approved.

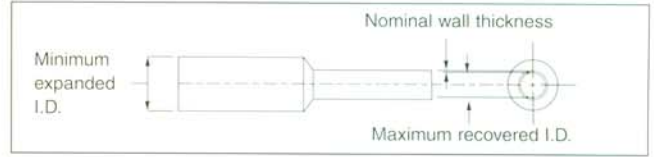

Ordering Information

Colors: Standard color is black. Specify, when ordering, for clear, red, yellow, blue or white.

Heat Shrink Tubing

Model No.	Minimum Expanded I.D.		Maximum Recovered I.D.		Nom. Wall Thickness		Total Length	
	In.	(mm)	In.	(mm)	In.	(mm)	Ft.	(m)
Individual 4' lengths								
HST-046	.046	(1.2)	.023	(0.6)	.016	(0.4)	100	(30.3)
HST-062	.062	(1.6)	.031	(0.8)	.017	(0.4)	100	(30.3)
HST-093	.093	(2.4)	.046	(1.2)	.020	(0.5)	100	(30.3)
HST-125	.125	(3.2)	.062	(1.6)	.020	(0.5)	100	(30.3)
HST-187	.187	(4.8)	.093	(2.4)	.020	(0.5)	100	(30.3)
HST-250	.250	(6.4)	.125	(3.2)	.025	(0.6)	100	(30.3)
HST-375	.375	(9.5)	.187	(4.8)	.025	(0.6)	100	(30.3)
HST-500	.500	(12.7)	.250	(6.4)	.025	(0.6)	20	(6.1)
HST-625	.625	(15.9)	.312	(7.9)	.030	(0.8)	20	(6.1)
HST-750	.750	(19.1)	.375	(9.5)	.030	(0.8)	20	(6.1)
HST-1000	1.000	(25.4)	.500	(12.7)	.035	(0.9)	20	(6.1)
HST-1500	1.500	(38.1)	.750	(19.1)	.040	(1.0)	20	(6.1)

On Reels								
HSTR-046	.046	(1.2)	.023	(0.6)	.016	(0.4)	1,000	(303)
HSTR-062	.062	(1.6)	.031	(0.8)	.017	(0.4)	1,000	(303)
HSTR-093	.093	(2.4)	.046	(1.2)	.020	(0.5)	1,000	(303)
HSTR-125	.125	(3.2)	.062	(1.6)	.020	(0.5)	1,000	(303)
HSTR-187	.187	(4.8)	.093	(2.4)	.020	(0.5)	1,000	(303)
HSTR-250	.250	(6.4)	.125	(3.2)	.025	(0.6)	500	(152)
HSTR-375	.375	(9.5)	.187	(4.8)	.025	(0.6)	500	(152)
HSTR-500	.500	(12.7)	.250	(6.4)	.025	(0.6)	200	(61)
HSTR-625	.625	(15.9)	.312	(7.9)	.030	(0.8)	200	(61)
HSTR-750	.750	(19.1)	.375	(9.5)	.030	(0.8)	200	(61)
HSTR-1000	1.000	(25.4)	.500	(12.7)	.035	(0.9)	100	(30.3)
HSTR-1500	1.500	(38.1)	.750	(19.1)	.040	(1.0)	100	(30.3)

Disk Packs								
HSTDP-046	.046	(1.2)	.023	(0.6)	.016	(0.4)	4	(1.2)
HSTDP-062	.062	(1.6)	.031	(0.8)	.017	(0.4)	4	(1.2)
HSTDP-093	.093	(2.4)	.046	(1.2)	.020	(0.5)	4	(1.2)
HSTDP-125	.125	(3.2)	.062	(1.6)	.020	(0.5)	4	(1.2)
HSTDP-187	.187	(4.8)	.093	(2.4)	.020	(0.5)	4	(1.2)
HSTDP-250	.250	(6.4)	.125	(3.2)	.025	(0.6)	4	(1.2)
HSTDP-375	.375	(9.5)	.187	(4.8)	.025	(0.6)	4	(1.2)
HSTDP-500	.500	(12.7)	.250	(6.4)	.025	(0.6)	4	(1.2)
HSTDP-625	.625	(15.9)	.312	(7.9)	.030	(0.8)	4	(1.2)
HSTDP-750	.750	(19.1)	.375	(9.5)	.030	(0.8)	4	(1.2)
HSTDP-1000	1.000	(25.4)	.500	(12.7)	.035	(0.9)	4	(1.2)

Assortment Kit (includes the following 4-inch lengths)

HSTKT-1							# Pieces
	.187	(4.8)	.093	(2.4)	.020	(0.5)	30
	.250	(6.4)	.125	(3.2)	.025	(0.6)	20
	.375	(9.5)	.187	(4.8)	.025	(0.6)	10
	.500	(12.7)	.250	(6.4)	.025	(0.6)	6
	.750	(19.1)	.375	(9.5)	.030	(0.8)	5
	1.000	(25.4)	.500	(12.7)	.035	(0.9)	4

ACCESSORIES

Heat Gun Model HSTG-1

- Designed for use on all types of heat-shrink tubing, except type TFE and FEP fluoroplastic Tefzel¹ and Kynar².
- Variable temperature range from 500° F (260° C) to 750° F (399° C).
- Neoprene jacketed cord with molded strain relief.
- Comes with adjustable stand.
- Replaceable bearings, brushes and heating elements for long life.

¹ Tefzel[®] is a registered trademark of E.I. DuPont de Nemours & Co.

² Kynar is a registered trademark of Elf Atochem.

Heat Gun Attachments

- **Model HSTG-D1** deflector for use on tubing up to .75" inside diameter.
- **Model HSTG-D2** deflector for use on tubing up to 1.5" inside diameter.
- **Model HSTG-D3** deflector concentrates hot air on tubing, away from heat sensitive items.