


PUSH-MOUNT CABLE TIES

RTPM Series Push-Mount

Available in Standard (50 lbs.) cross-section with lengths from 4.75" to 8" to secure .0625" to 1.75" bundle diameters.

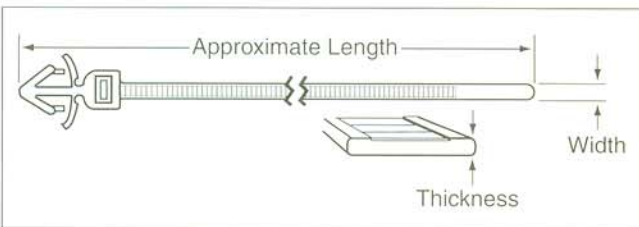

Compliances

RTPM Push-Mount cable ties are recognized under the Component Program of Underwriters Laboratories Inc. for use at temperatures not exceeding 85° C (185° F). File No. E76766(N). The basic and modified Type 66 nylons used in All-States RTPM Series mounting cable ties meet UL94V-2 Flammability Classification. Fire-retardant Type 66 nylon meets UL 94V-0. All RTPM Series cable ties are manufactured to the same Mil Spec quality standards required by MS-3367.

Ordering Information

Materials: Factory-stocked cable ties include Type 66 nylon in natural and black; and outdoor, weather-resistant/UV-stabilized in black.

Push-Mount Cable Ties

Model No.	Min. Loop Tensile Strength		Max. Bundle Diameter		Approx. Length		Strap Width		Strap Thickness		Cross Section Series	Screw Hole Size	
	Lbs.	(Kg)	In.	(mm)	In.	(mm)	In.	(mm)	In.	(mm)		In.	(mm)
RTPM-304	18	(8)	1.00	(25)	4.75	(121)	.100	(2.5)	.045	(1.1)	M	.19	(4.8)
RTPM-675	50	(23)	1.75	(45)	8.00	(203)	.190	(4.8)	.055	(1.4)	S	.25	(6.4)

① Cross-Section Series (tensile strength): M = Miniature (18#); and S = Standard (50#).