


SPIRAL WRAPPING

- Organizes multiple wires into one bundle.
- Protects wire from abrasion.
- Allows breakouts of single or multiple wires for re-routing or replacement.
- Flame Retardant Polyethylene material meets UL requirements for 94V-0 flame rating .
- Applications include communications and computer equipment, OEM protection of tubes and harnesses, protection of glass tubing.

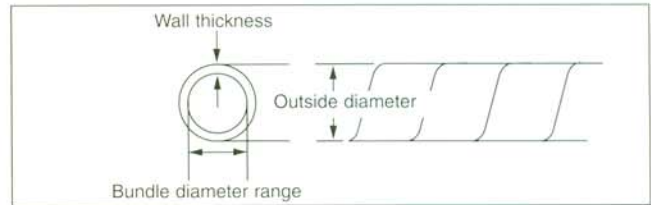

Ordering Information

Spiral Wrapping

Model No.	O.D. Size		Bundle Diameter Range		Wall Thickness		Standard Package Length		Bulk Reel	
	In.	(mm)	In.	(mm)	In.	(mm)	Ft.	(m)	Ft.	(m)
Polyethylene —Natural (Also available in UV-black, brown, red, orange, yellow, green, blue, purple and gray.)										
SW-125	.125	(3.2)	.063—	.50 (1.6—12.7)	.032	(.8)	100	(30.3)	500	(152)
SW-187	.187	(4.8)	.125—	.75 (3.2—19.1)	.030	(.8)	100	(30.3)	500	(152)
SW-250	.250	(6.4)	.188—	2.0 (4.8—50.8)	.035	(.9)	100	(30.3)	500	(152)
SW-250H	.250	(6.4)	.188—	2.0 (4.8—50.8)	.045	(1.1)	100	(30.3)	500	(152)
SW-375	.375	(9.5)	.313—	3.0 (8.0—76.2)	.052	(1.3)	100	(30.3)	500	(152)
SW-500	.500	(12.7)	.375—	4.0 (9.5—101.6)	.062	(1.6)	100	(30.3)	500	(152)
SW-625	.625	(15.9)	.500—	4.5 (12.7—114.3)	.062	(1.6)	100	(30.3)	250	(76)
SW-750	.750	(19.1)	.625—	5.0 (15.9—127.0)	.065	(1.7)	100	(30.3)	200	(61)
SW-1000	1.000	(25.4)	.875—	6.0 (22.2—152.4)	.080	(2.0)	100	(30.3)	100	(30.3)
SW-1250	1.250	(31.8)	1.125—	7.0 (28.6—177.8)	.090	(2.3)	75	(22.7)	75	(22.7)
Flame-Retardant Polyethylene —White (Also available in UV-black.)										
SW-125	.125	(3.2)	.063—	.50 (1.6—12.7)	.032	(.8)	100	(30.3)	500	(152)
SW-250	.250	(6.4)	.188—	2.0 (4.8—50.8)	.045	(1.1)	100	(30.3)	500	(152)
SW-375	.375	(9.5)	.313—	3.0 (8.0—76.2)	.052	(1.3)	100	(30.3)	500	(152)
SW-500	.500	(12.7)	.375—	4.0 (9.5—101.6)	.062	(1.6)	100	(30.3)	500	(152)
SW-625	.625	(15.9)	.500—	4.5 (12.7—114.3)	.062	(1.6)	100	(30.3)	250	(76)
SW-750	.750	(19.1)	.625—	5.0 (15.9—127.0)	.065	(1.7)	100	(30.3)	200	(61)
SW-1000	1.000	(25.4)	.875—	6.0 (22.2—152.4)	.080	(2.0)	100	(30.3)	100	(30.3)
Nylon —Natural (Also available in UV-black.)										
SW-125	.125	(3.2)	.063—	.50 (1.6—12.7)	.015	(.4)	100	(30.3)	500	(152)
SW-250	.250	(6.4)	.188—	2.0 (4.8—50.8)	.020	(.5)	100	(30.3)	500	(152)
SW-375	.375	(9.5)	.313—	3.0 (8.0—76.2)	.035	(.9)	100	(30.3)	500	(152)
SW-500	.500	(12.7)	.375—	4.0 (9.5—101.6)	.035	(.9)	100	(30.3)	500	(152)
SW-625	.625	(15.9)	.500—	4.5 (12.7—114.3)	.032	(.8)	100	(30.3)	250	(76)
SW-750	.750	(19.1)	.625—	5.0 (15.9—127.0)	.032	(.8)	100	(30.3)	200	(61)
SW-1000	1.000	(25.4)	.875—	6.0 (22.2—152.4)	.032	(.8)	100	(30.3)	100	(30.3)
Teflon —Natural										
SW-062	.062	(1.6)	.040—	.09 (1.0—2.3)	.016	(.4)	100	(30.3)	500	(152)
SW-125	.125	(3.2)	.063—	.50 (1.6—12.7)	.020	(.5)	100	(30.3)	500	(152)
SW-125H	.125	(3.2)	.063—	.50 (1.6—12.7)	.030	(.8)	100	(30.3)	500	(152)
SW-187	.187	(4.8)	.063—	.75 (1.6—19.1)	.030	(.8)	100	(30.3)	500	(152)
SW-250	.250	(6.4)	.188—	2.0 (4.8—50.8)	.030	(.8)	100	(30.3)	500	(152)
SW-375	.375	(9.5)	.313—	3.0 (8.0—76.2)	.030	(.8)	100	(30.3)	500	(152)
SW-500	.500	(12.7)	.375—	4.0 (9.5—101.6)	.030	(.8)	100	(30.3)	500	(152)
SW-625	.625	(15.9)	.500—	4.5 (12.7—114.3)	.030	(.8)	100	(30.3)	250	(76)
SW-750	.750	(19.1)	.625—	5.0 (15.9—127.0)	.032	(.8)	100	(30.3)	200	(61)
SW-1000	1.000	(25.4)	.875—	6.0 (22.2—152.4)	.040	(1.0)	100	(30.3)	100	(30.3)