

ANATOM98S M12

WITH Awax safety module


CODED NON-CONTACT SAFETY SWITCH FOR THE CONTROL OF MACHINE GUARDS

- Acotom®2 decoding process
- Power supply: 24Vac/dc -15%/+10% or T11/T21 of AWAX
- Switching distance/hysteresis : 8 /3 mm
- Auxiliary contact : NO PNP (supply)/ 250mA
- Protection class IP67
- Temperature -20°C to +60°C
- Response time: 500µs

SAFETY CATEGORY

- ANATOM98S M12 : EN60947-5-3
- ANATOM98S M12 with Awax : category 4
- ANATOM98S M12 in series with Awax : category 3

WIRING DIAGRAM

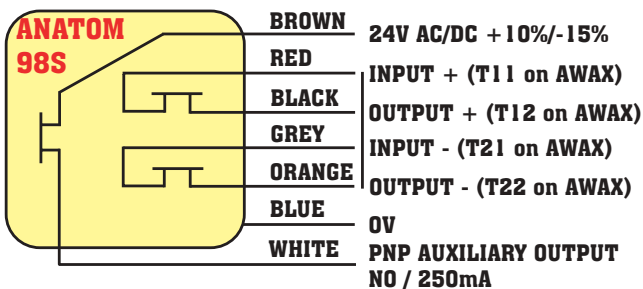

ACOTOM2


Tamperproof thanks to electrical decoding system



LED viewed via translucent zone

Quick wiring in series

DIMENSIONS

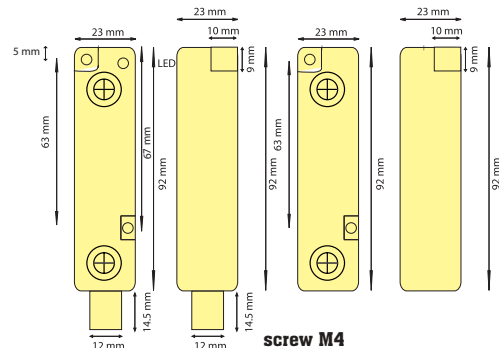

PIN DETAILS


Male input connector:

- 1 white T11
- 2 brown 24V
- 3 green AUX NO
- 4 yellow T21
- 5 grey T12
- 6 pink T22
- 7 blue 0V
- 8 red AUX NO

Accessory:

- FKT M12 with
- 2, 5 or 10 M cable

INM



ADVICE

Ideal solution for quick and easy wiring in series.