




Special Use Solid State Overloads, Class 958



Ordering Information

- ▶ Application Data see page 480.
- ▶ Dimensions see page 489-490.
- ▶ Wiring Diagrams see page 489.
- ▶ Technical Data see bottom of page.
- ▶ Adapter plate for replacing Class 948C through 948F with 958C through 958F styles order part number 49D57124 \$12.80.


Trip Curve A

Amp Range	Frame Size	Man-Reset Catalog No	Price \$	Self-Reset Catalog No	Price
15-30	A1	958AA32A	289.	958AA31A	289.
22-44	A1	958BA32A	289.	958BA31A	289.
33-66	B	958CA32A	334.	958CA31A	334.
50-100	B	958DA32A	334.	958DA31A	334.
75-150	B	958EA32A	366.	958EA31A	366.
90-180	B	958FA32A ^①	385.	958FA31A ^①	385.
180-500	A	958GA32A ^②	289.	—	—

Trip Curve B


Amp Range	Frame Size	Man-Reset Catalog No	Price \$	Self-Reset Catalog No	Price
15-30	A1	958AA32B	289.	958AA31B	289.
22-44	A1	958BA32B	289.	958BA31B	289.
33-66	B	958CA32B	334.	958CA31B	334.
50-100	B	958DA32B	334.	958DA31B	334.
75-150	B	958EA32B	366.	958EA31B	366.
90-180	B	958FA32B ^①	385.	958FA31B ^①	385.
180-500	A	958GA32B ^②	289.	—	—

Trip Curve A

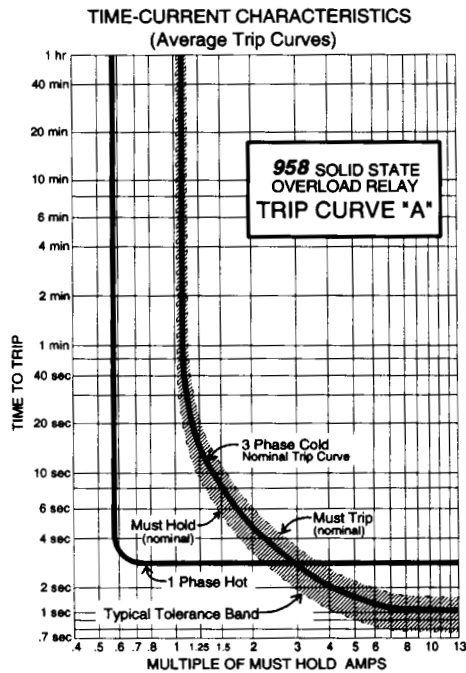

(*) Hot trip times will vary depending on previous running condition, duty cycle, and length of "Off" time.

Trip Curve B

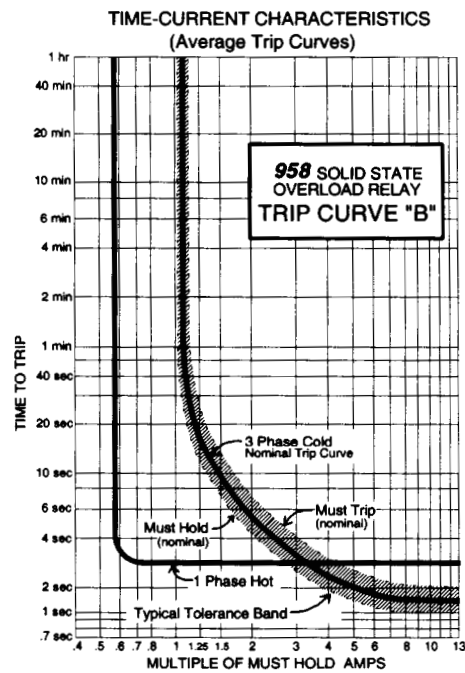

(*) Hot trip times will vary depending on previous running condition, duty cycle, and length of "Off" time.

①Temperature rating -20° to +60°C.
 ②Requires 500:5 current transformers—3 of 97CT007 \$141 each.