

Mechanical-Locking Routing Clamps

Bulk Pkg. Cat. No.	Mounting Hole Size	Maximum Wire Bundle Diameter (in.)	Width (in.)	Length (in.)	Bulk Pkg. Quan.
TC88	.250	.500	.250	.891	100
TC95	.250	1.000	.500	1.590	100

The locking clamp is available in several mounting styles, as shown. This clamp acts as a retainer during wire routing and as a positive clamp when desired. Anti-rotational peg is available.



Here is an inexpensive harness clip for grouping wires in appliances, office equipment and other noncritical applications.

Designed to perform the same basic function as a cable tie in holding wires together, the new adjustable, self-locking clip requires no tools for installation. A projecting prong is simply pressed into a ¼" hole where it compresses and locks. The simple ratchet-type lock is released by moving the locking lever.

Harness Clips

Bulk Pkg. Cat. No.	Mounting Hole Size	Maximum Wire Bundle Diameter (in.)	Bulk Pkg. Quan.
HCP438	¼	.375	1000

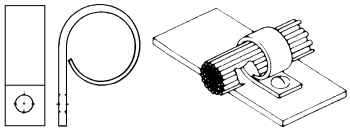

C-loop retaining clamp is ideal to support long runs in point-to-point wiring or as a harness aid. Rigid PVC.

Bundle-Retaining Clamp

Bulk Pkg. Cat. No.	Mounting Method	Maximum Wire Bundle Diameter (in.)	Width (in.)	Bulk Pkg. Quan.
TC70	#10 screw	.250	.400	100
TC71	#10 screw	.500	.400	100
TC72	#10 screw	.750	.500	100
TC73	#10 screw	1.000	.500	100
TC74	#10 screw	1.500	.500	100